


### Installation Instructions

Each 1x8 3-lamp fixture is provided with a two-circuit wiring harness. The fixtures are labeled as "Orange" circuit or "Brown" circuit fixtures. For continuous row installations, each consecutive fixture will use an alternating circuit. Also, each row will start with an alternating circuit. For example, if the first row starts with a "Orange" circuit fixture (as shown in the diagram below), it will be followed by a "Brown" circuit fixture. This pattern will repeat for the entire row. The next row will start with a "Brown" circuit fixture.

\*Note also the orientation of the lamps in the fixtures. The fixtures must be placed so that the lamp arrangement alternates from one row to the next. For example, if the first row begins with the single-lamp end of the fixture, the second row must start with the double-lamp end of the fixture.

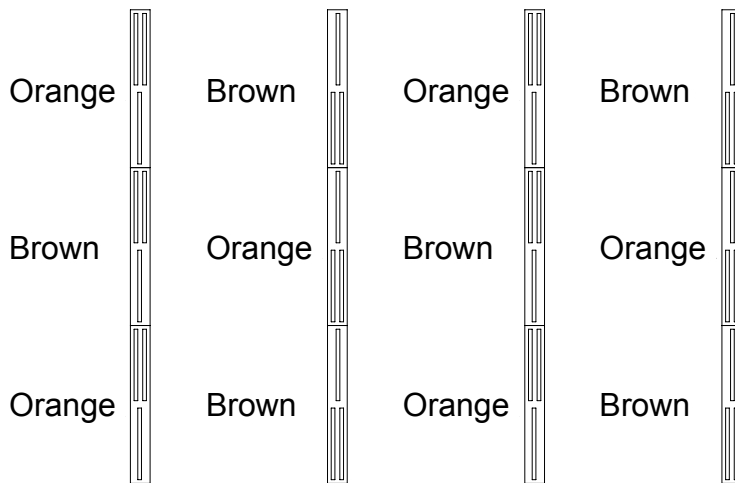

### Wiring Harness Detail

The wiring harness has a quick-connect receptacle on each end. The receptacles are keyed to ensure proper installation.

