


Step 1 Attach the formed wire hanger to the Power Strip fixture.

Locate the four 0.25" holes at each end of the fixture body. Align the ends of the wire hanger with two of the outboard 0.25" holes and point the "hooks" of the wire hanger towards the adjacent set of 0.25" holes. Angle the wire hanger towards the adjacent set of 0.25" holes and slide the ends of the hanger into the fixture cavity. Position the hanger so it is vertical with respect to the fixture body and pull up while aligning the "hooks" of the wire hanger with the adjacent set of 0.25" holes. (Note: If desired, slide the wire hanger through a link of the suspension chain prior to attaching the wire hanger to the fixture body.

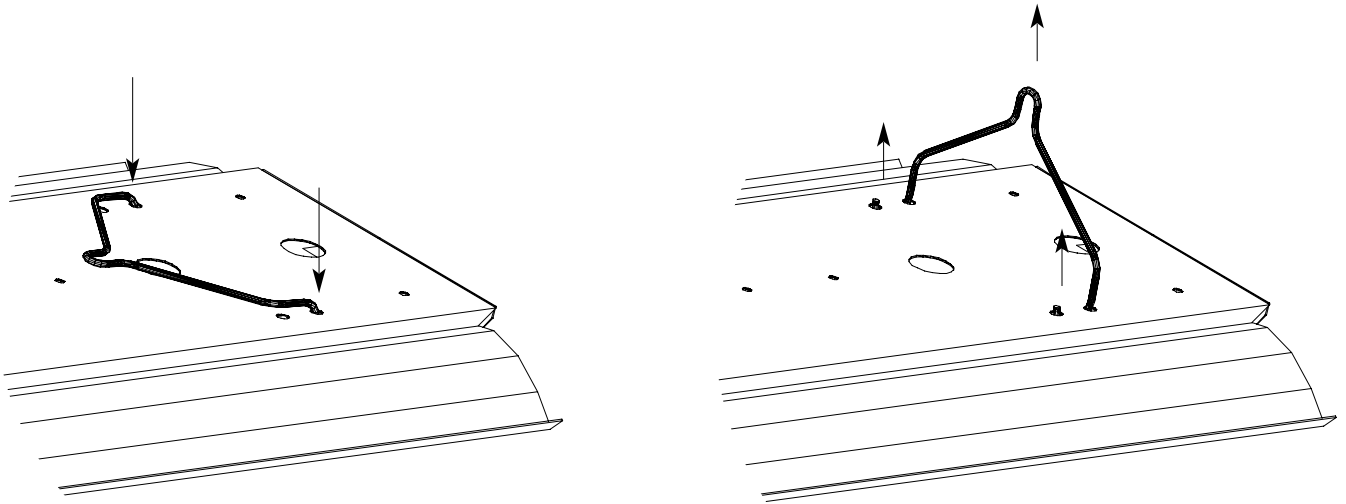

Step 2 Install the Power Strip fixture

Elevate the Power Strip fixture to the desired location and secure the top end of the chain to the roof or joist using appropriate fasteners (follow instructions provided from the fastener manufacturer). Following all applicable electrical codes, electrically activate the fixture.

