

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

Shallow depth construction provides for simple install and material management

Diverse controls compatibilities provide ease of mind in useability

Robust construction by use of pre painted steel sheet metal

Dependable light engine provided by LEDvance LED Boards and Xitanium LED Drivers

Expanse of light engine choices in addition to several possible options and adders



## SPECIFICATIONS

### CONSTRUCTION

Pre painted white steel utilizing screw fasteners

Pre painted aluminum LED gear pan for efficient heat dissipation

### MOUNTING & INSTALLATION

Multiple hanging options including y toggle and rigid v hangers

Back mounted access plate for quick electrical connections

### OPTICAL

Option for an evenly diffuse flat extruded acrylic lens

Low profile shallow design provides wide light distribution

### ELECTRICAL

LED Light Engine designed for reliability and long life operation

Standard 0-10V dimming to 1% with other standards available

120 / 277 compatible with other voltages available

### CONTROLS

Individual or grouping control with many brands available

For further in depth controls integrations, please see page 2


### LISTINGS

DesignLights Consortium qualified, see DLC QPL

ETL safety certified for damp locations

Standard 5 year warranty / 10 year warranty available upon request

## DIMENSIONAL INFORMATION

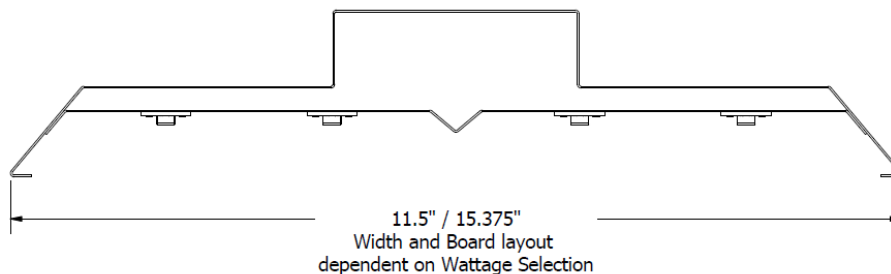

## ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE			COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	<b>12HD</b> 1' x 2'	<b>1' X 2'</b> OPEN / FROSTED	<b>2' X 2'</b> OPEN / FROSTED	<b>2' X 4'</b> OPEN / FROSTED	<b>35</b> 3500K	<b>FR</b> FROSTED LENS	<b>480T</b> 480 VOLT (120V-277V STANDARD)
	<b>22HD</b> 2' x 2'	<b>F2V3</b> 63W 9556 LUMENS 8600 LUMENS	<b>F21L5</b> 122W 18577 LUMENS 16724 LUMENS	<b>F42M0</b> 244W 37153 LUMENS 33448 LUMENS	<b>40</b> 4000K		
	<b>24HD</b> 2' x 4'	<b>F2Y4</b> 74W 11043 LUMENS 9942 LUMENS	<b>F21M8</b> 142W 21280 LUMENS 19158 LUMENS	<b>F42C7</b> 285W 42709 LUMENS 38450 LUMENS	<b>50</b> 5000K		
	<b>F2C1</b> 92W 14047 LUMENS 12646 LUMENS	<b>F21Z2</b> 184W 28094 LUMENS 25293 LUMENS	<b>F43V4</b> 368W 56189 LUMENS 50586 LUMENS				
	<b>F21I0</b> 102W 15224 LUMENS 13944 LUMENS	<b>F22I0</b> 206W 31189 LUMENS 28079 LUMENS	<b>F44X0</b> 410W 62076 LUMENS 55886 LUMENS				
						<b>FR</b> FROSTED LENS	<b>480T</b> 480 VOLT (120V-277V STANDARD)
							<b>SD</b> STEP DIMMING (BI LEVEL OR TRI LEVEL)
							<b>LVD120 / 277</b> 120V / 277V LINE VOLTAGE DIMMING
							<b>D</b> PREWIRED FOR 0-10V DIMMING
							<b>EM</b> EMERGENCY BACKUP INCLUDED (6W STANDARD)
							<b>DTOAUX</b> DIM TO OFF AND 12V / 24V LED DRIVER
							<b>OCC</b> VARIOUS OCCUPANCY SENSORS AVAILABLE FOR VARIOUS CONTROL TYPES
							<b>AVI</b> AVI-ON WIRELESS CONTROLS VARIOUS OPTIONS, PLEASE SPECIFY COMPONENT CHOICES
						<b>CUSTOM OPTIONS</b>	

\* 2765 is only for color select options using a compatible control

## ADDITIONAL GRAPHICS

